

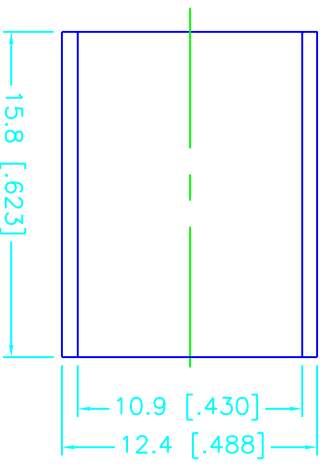
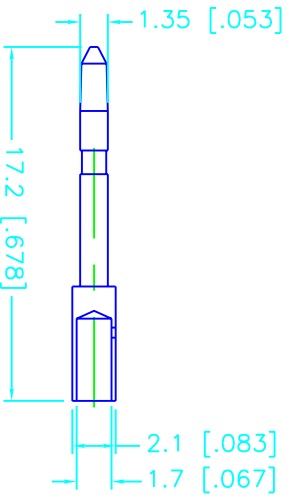


REV.	DATE
NC	09/30/99

DESCRIPTION  
INITIAL RELEASE

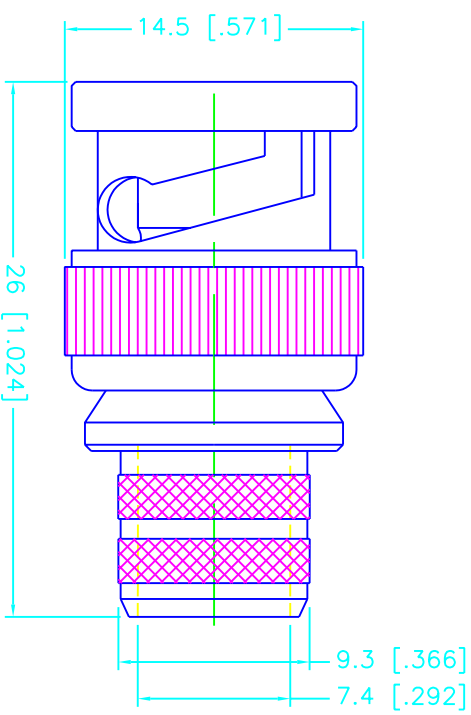

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS FOR CUSTOMER REFERENCE ONLY	APPROVALS	DATE	TITLE	SCALE	PART NO.	DWG. NO.	SHEET	REV.
1 BODY	BRASS	NICKEL	DIMENSIONS IN ( ) ARE IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN	09/30/99	BNC CRIMP PLUG -RG11/U 14-AWG CONTACT (FOR BELDEN 9292, 8213 CABLE - 75ohms)	A	99001	112606.DWG	1 OF 1	NC
2 INSULATOR	TEFLON	NATURAL		CHECKED							
3 CONTACT PIN	BRASS	GOLD		ISSUED							
4 FERRULE	COPPER	NICKEL									
5											
6											
7											
8				DO NOT SCALE DRAWING							

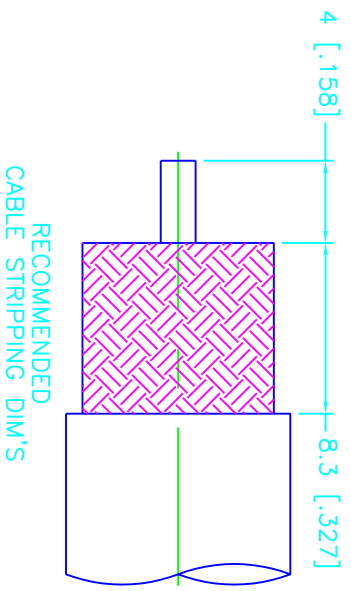