
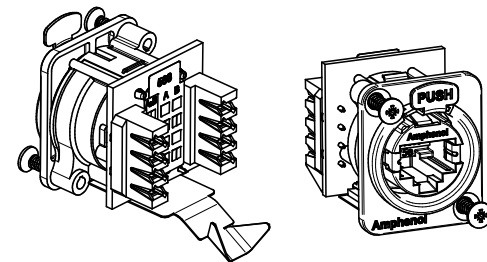

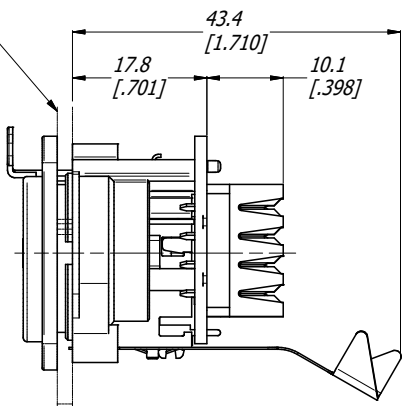


FRONT PANEL

METAL FLANGE ASSEMBLED AT PANEL REAR SIDE

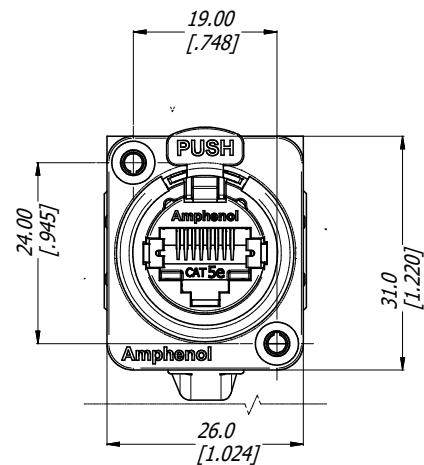

3D VIEW
1:1

METAL FLANGE ASSEMBLED AT PANEL FRONT SIDE

SPECIFICATIONS:

1. MATERIALS:

- PLASTIC INSERT & HOUSING: HIGH TEMPERATURE THERMOPLASTIC FLAMMABILITY RATING UL94V-0 DSM Stanyl, 30% BLACK
- FRONT METAL SHELL: ZINC ALLOY ZAMAK 3, NICKEL PLATE.
- CONTACTS: PHOSPHORE BRONZE, 1.27 um GOLD PLATE ON MATING SURFACES, 1.27 um NICKEL MIN UNDERPLATE. 3.81 um MIN MATTE TIN ON CONTACT TAILS.
- LATCH LOCK AND SPRING: SPRING STEEL, NICKEL PLATE.
- EMI/RFI HOOD: BRASS, TIN PLATE

2. ELECTRICAL CHARACTERISTICS:

- RATED VOLTAGE: 125 VAC
- TYPICAL CONTACT RESISTANCE: 20 mOhm
- INSULATION RESISTANCE: > 500 MOhm
- DIELECTRIC STRENGTH: 1000 VAC, 60 SECONDS
- TRANSMISSION SPECIFICATION/CLASS: COMPLIES WITH CAT6 1000 BASE-T PER EIA-568-C.2 AND ISO 11801
- PoE+ COMPLIES WITH 802.3at Type 2
- CAT5e AND CAT6 SUPPORT PoE TYPES 1 TO 4 AND IEC60603-7 COMPLIANT

TABLE OF PART NUMBERS

PART No.	METAL SHELL FINISH
RJX8FD6I	NICKEL
RJX8FE6I	BLACK



UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE		THIS DOCUMENT IS THE PROPERTY OF AMPHENOL AUSTRALIA PTY. LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER.		Amphenol		Amphenol Australia Pty Ltd, 22 Industry Blvd, Carrum Downs VIC 3201 Australia	
LINEAR	ANGULAR	MATERIAL:	DRN:	T.N	DATE:	06/06/17	TITLE:
X ± 0.5	X° ± 1	REFER SPECIFICATION	CKD:	P.M	DATE:	06/06/17	XLrnet D TYPE CAT6 PUNCHDOWN IDC CUSTOMER DRAWING
X.X ± 0.1	X.X° ± 30°	DO NOT SCALE	APP'D:	P.M	DATE:	06/06/17	PART No:
X.X ± 0.05	X.X.X° ± 15°	FINISH:	SCALE:	3:2	SIZE:	A3	REFER TABLE P/No.
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS		DIMENSIONS IN MILLIMETRES		THIRD ANGLE PROJECTION		REV	
						DRAWING No.	
						55011238-000-2	
						SHEET	
						2/2	