

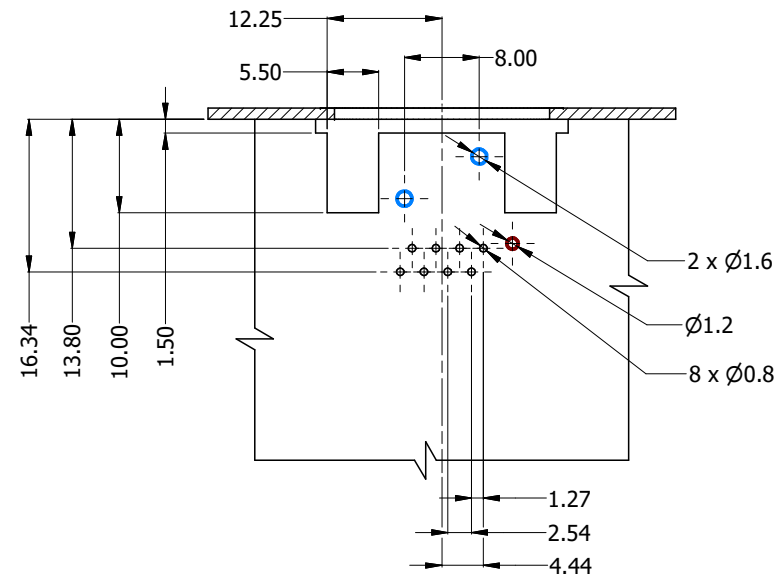
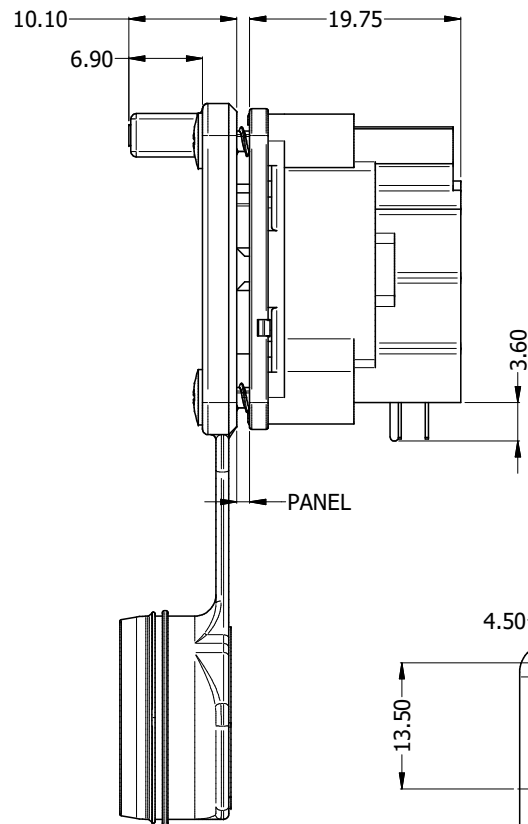


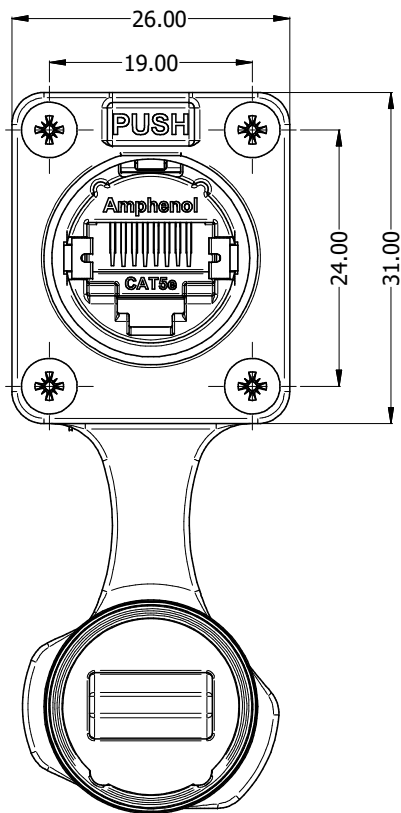


PCB LAYOUT (CONNECTOR TOP VIEW)


- RJ45 CONTACTS
- RJ45 SHELL GROUND CONTACT
- CONNECTOR LOCATION PINS

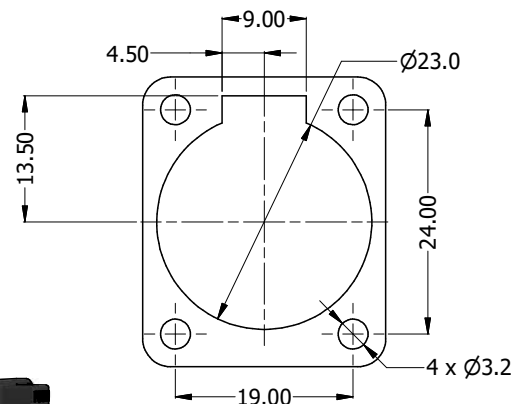

PANEL CUT OUT

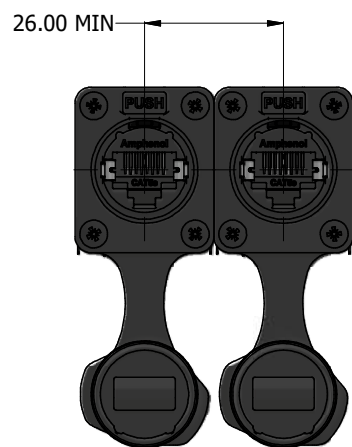

1.2-2.5mm RECOMMEND
PANEL THICKNESS

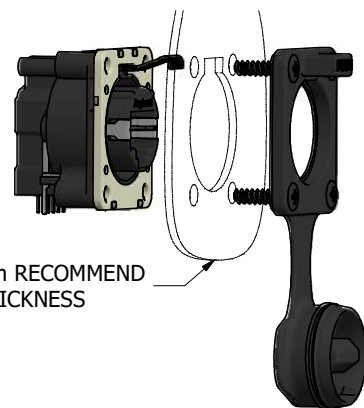

RJXS8FP5HP

- SERIES PREFIX
- CONTACT LAYOUT (RJ45 STYLE)
- GENDER
- FOUR HOLE RECEPTACLE HOUSING IP65, WITH CAP (BLACK)
- TRANSMISSION CLASS (CAT5e)
- HORIZONTAL MOUNT (PCB THRU HOLE)
- POTTED

RECOMMEND MINIMUM MOUNTING PITCH



UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE:		THIS DOCUMENT IS THE PROPERTY OF AMPHENOL AUSTRALIA PTY. LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER				Amphenol		Amphenol Australia Pty.Ltd, 22 Industry Blvd Carrum Downs, VIC 3201		
LINEAR		ANGULAR		MATERIAL:		DRN: J.W	DATE: 28/08/2023	TITLE:	PART NO:	REV
X ±10	X" ±1	X"X" ±30'		SEE COMPONENTS		CKD: P.M.	DATE: 28/08/2023	XLNnet, HORZ, IP65, POTTED, UNSHIELDED, W/CAP, PANEL	RJXS8FP5HP	1
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS		DO NOT SCALE		FINISH: SEE COMPONENTS		APP'D: P.M.	DATE: 28/08/2023	THICKNESS 1.2-2.5	55011417-100-1	2/3
DIMENSIONS IN MILLIMETRES				THIRD ANGLE PROJECTION		SCALE: NTS	SIZE: A3			