

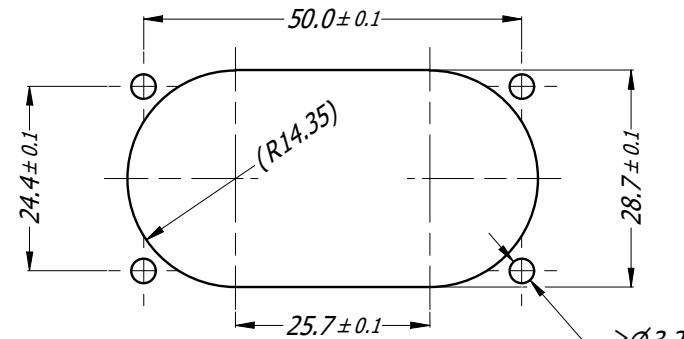
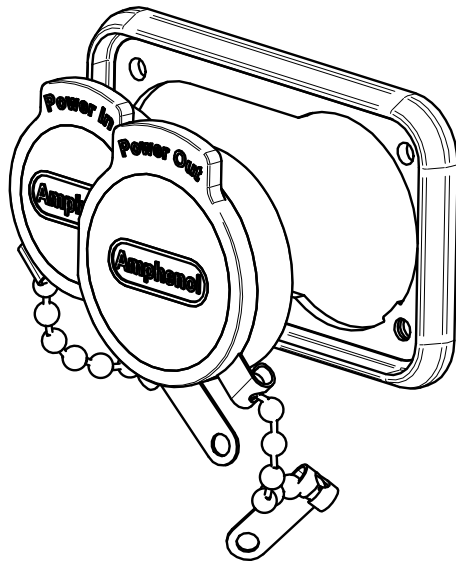


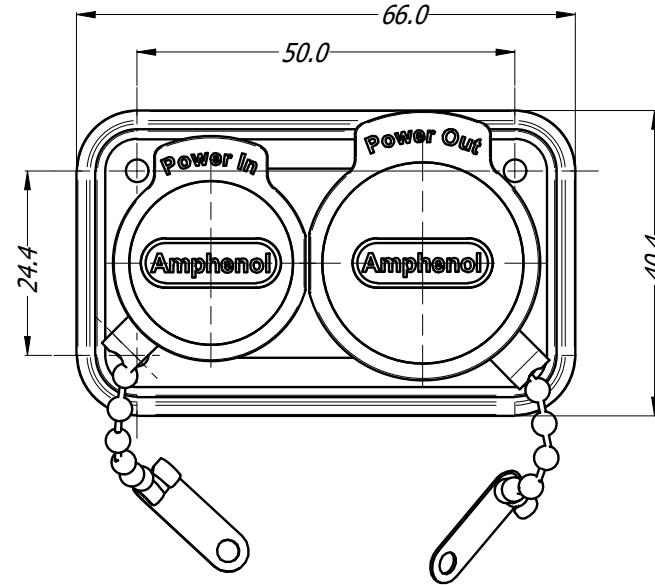

CALUS

REVISION HISTORY

REV	DESCRIPTION	BY	DATE	ECN
1	FIRST ISSUE	T.N	26/07/19	9549
2	UPDATE TOLERANCE LIMIT	MH	25-09-25	9773

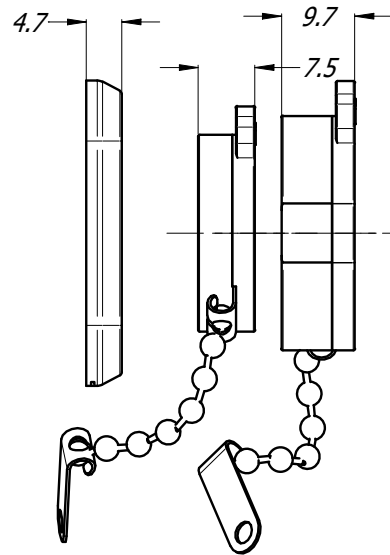

PANEL CUTOUT

- NOTES:
- USE #4 OR M3 SCREW.
 - TIGHTEN TO 0.35 N-m (3.1 lb-in)

UNLESS OTHERWISE SPECIFIED
TOLERANCE TO BE

LINEAR	ANGULAR
X ± 0.5	X° ± 1
X.X ± 0.2	X.X° ± 30'
X.XX ± 0.1	X.XX" ± 15'

BREAK ALL SHARP EDGES
AND REMOVE ALL BURRS


DO NOT SCALE

DIMENSIONS IN MILLIMETRES

THIS DOCUMENT IS THE PROPERTY OF AMPHENOL AUSTRALIA PTY. LTD.
NO PART THEREOF MAY BE REPRODUCED AND USED
WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER

MATERIAL:

FINISH:



DRN:	T.N	DATE:	26/07/19
CKD:	MH	DATE:	25-09-25
APP'D:	PM	DATE:	25-09-25
SCALE:	1:1	SIZE:	A4

Amphenol

**PROTECTIVE CAP
HPT SERIES DUAL
BEADED CHAIN**

Amphenol Australia Pty.Ltd,
22 Industry Blvd Carrum Downs, VIC 3201

PART No:

HPT-CAPD

DRAWING No.

55011251-000-4

SHEET

3/4

CB4.17.F1